
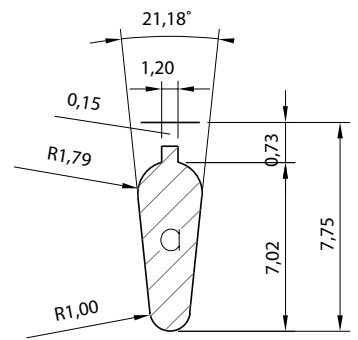



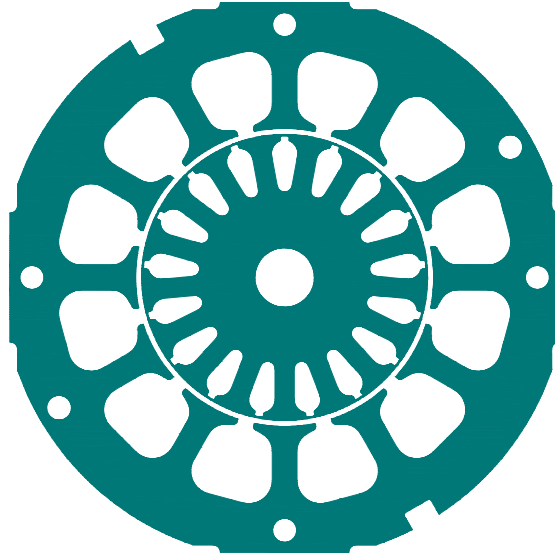

EU 0600A

Lamierini tranciati - Macchine asincrone

SA073S

RA038S

DE mm	DI mm	N	A mmq	LD mm	LC mm	LS mm	AC mm
73,00	38,50	12	85,70	3,20	7,30	71,00	2,20

de mm	n	a mmq	ld mm	ac mm
38,50	17	19,13	2,60	1,20

#	RI	GR	SA	MT	PT	RF	V	P _{1mm} g
1	✓				✓			14,43
4	✓							14,57

#	di mm	pz	c	l	fv	ri	P _{1mm} g
1	5						6,39
2	6						6,32
3	8						6,15
4	12						5,66
5	14						5,34
6	17						4,77



LEGENDA ROTORE - sezione A