




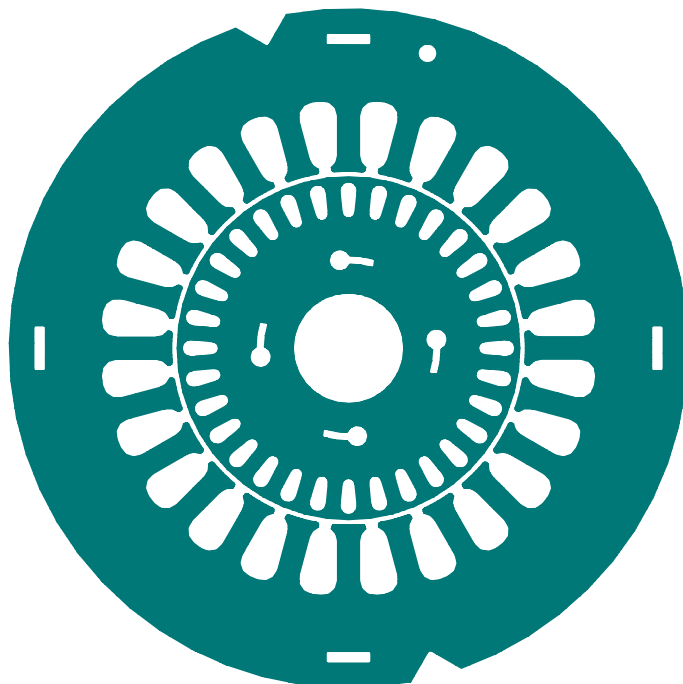

EU 0990A

Lamierini tranciati - Macchine asincrone

SA090S CPK

RA046S CPK

DE mm	DI mm	N	A mmq	LD mm	LC mm	LS mm	AC mm
90,00	47,00	24	38,80	2,87	11,96	0,00	1,80

de mm	n	a mmq	ld mm	ac mm
46,50	32	9,65	1,80	0,00

#	RI	GR	SA	MT	PT	RF	V	P _{1mm} g
1				✓			✓	28,44
2				✓				28,64
3							✓	28,67

#	di mm	pz	c	l	fv	ri	P _{1mm} g
2	15,07						9,22
3	17						8,84
4	8						10,22
6	13	✓					9,58



LEGENDA ROTORE - sezione A

de	Diametro esterno
di	Diametro interno
n	Numero cave
a	Area cava
ld	Larghezza dente
ac	Apertura cava
pz	Pozzetto
c	Scanalatura per chiavetta
l	Foro lobato
fv	Fori di ventilazione
ri	Fori per rivetti
P _{1 mm}	Peso indicativo g per 1 mm/sp.

A full-page view of a blank sheet of graph paper. The grid consists of small, uniform squares formed by thin, light gray lines. The paper is otherwise white and contains no other markings or text.