



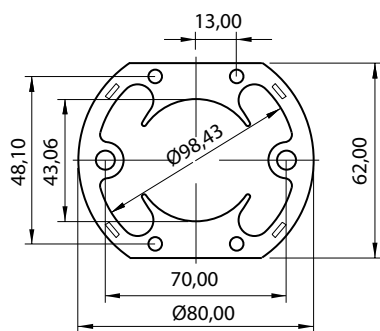

EU 0600B

Lamierini tranciati - Motori universali

SU080A

DE mm	DI mm	DP mm	LA mm	LU mm	LP mm	α °
80,00	43,06	15,00	62,00	80,00	43,93	142,00

#	RI	PT	NF	CP	RF	P _{1 mm} g
1	✓	✓				15,4

RU042A

de mm	n	a mmq	ld mm	ac mm
42,10	12	43,40	2,80	2,00

#	di mm	pz	c	l	fv	P _{1 mm} g
1	10					5,66
2	12					5,39



LEGENDA ROTORE - sezione B