


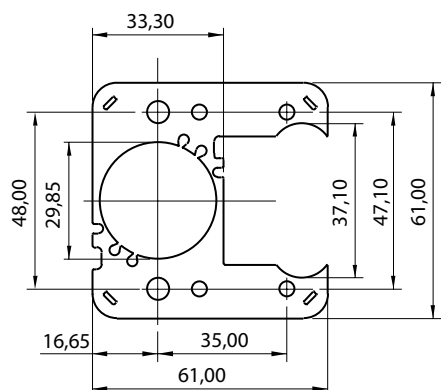


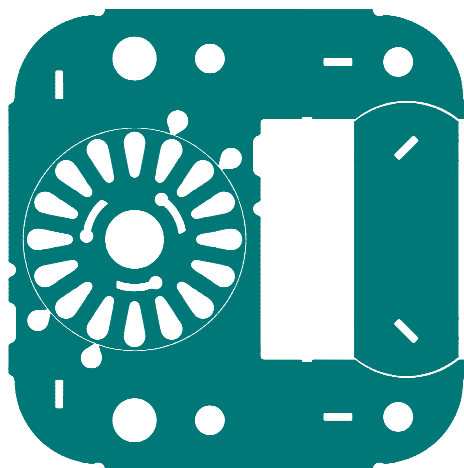

EU 0150C

Lamierini tranciati - Motori a poli schermati

SS061C CPK

TS061C CPK

RS029C CPK

DE mm	DI mm	LU mm	LA mm	LI mm	PB mm	$\alpha 1$ °	$\alpha 2$ °
0,00	29,85	61,00	61,00	48,00	32,10	20,00	50,00




DI mm	L mm	S mm
0,00	37,1	14,10

de mm	n	a mmq	ld mm	ac mm
29,25	16	14,00	1,93	0,00

#	RI	PT	NF	CP	RF	P _{1mm} g
1		✓	✓			13,63

#	RI mm	P _{1mm} g
1		3.90

#	di mm	pz	c	l	P _{1mm} g
1	4,5				3,29
2	6				3,19
3	8				3,02
5	3,2				3,35
6	5				3,26

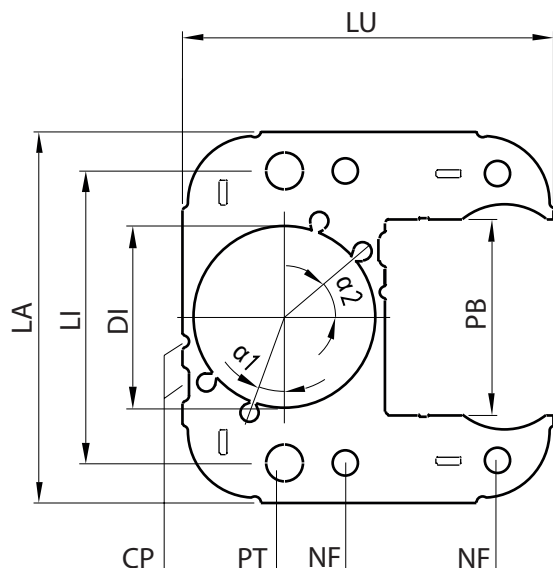

LEGENDA STATORE - sezione C

DI	Diametro interno
LU	Lunghezza
LA	Larghezza
LI	Interasse
PB	Passaggio bobina
$\alpha 1$	Ampiezza angolo 1
$\alpha 2$	Ampiezza angolo 2
PT	Fori passaggio tiranti
NF	Fori per fissaggio
CP	Cave periferiche
P_{1mm}	Peso indicativo g per 1 mm/sp.

LEGENDA TEGOLO - sezione C

S	Larghezza
L	Lunghezza
RI	Fori per rivetti
P_{1mm}	Peso indicativo g per 1 mm/sp.

LEGENDA ROTORE - sezione C

de	Diametro esterno
di	Diametro interno
n	Numero cave
a	Area cava
ld	Larghezza dente
P_{1mm}	Peso indicativo g per 1 mm/sp.

NOTE

