


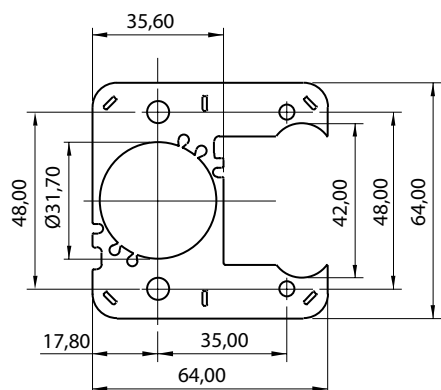


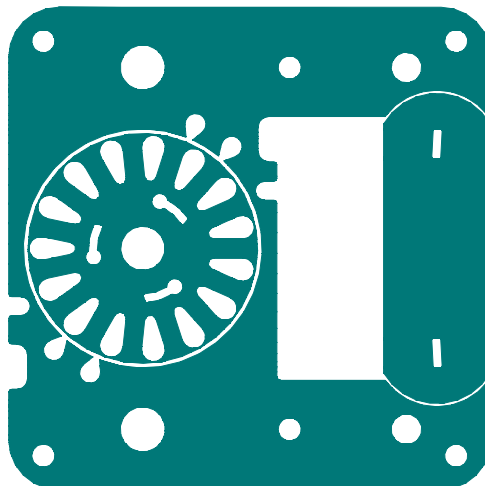

EU 2012C

Lamierini tranciati - Motori a poli schermati

SS064K

TS064K CPK

RS031K CPK

DE mm	DI mm	LU mm	LA mm	LI mm	PB mm	$\alpha 1$ °	$\alpha 2$ °
0,00	31,70	64,00	64,00	17,80	35,00	23,00	41,00




DI mm	L mm	S mm
0,00	42,0	14,30

de mm	n	a mmq	ld mm	ac mm
31,10	15	14,58	2,54	0,00

#	RI	PT	NF	CP	RF	P _{1mm} g
4		✓	✓			15,67

#	RI mm	P _{1mm} g
1		4.43

#	di mm	pz	c	l	P _{1mm} g
1	6				3,91
2	7				3,83
3	8				3,74

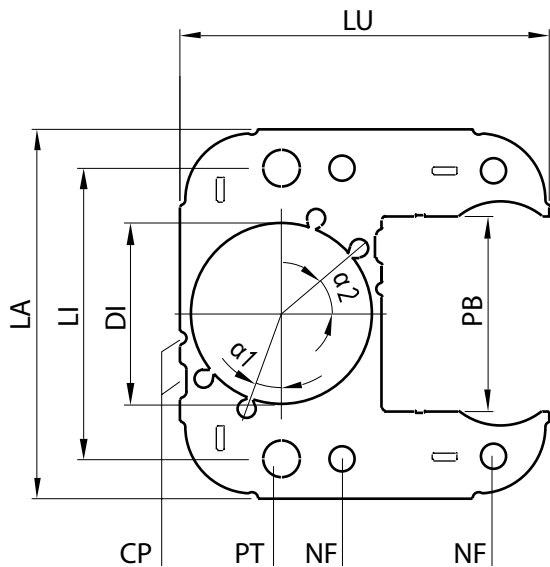

LEGENDA STATORE - sezione C

DI	Diametro interno
LU	Lunghezza
LA	Larghezza
LI	Interasse
PB	Passaggio bobina
$\alpha 1$	Ampiezza angolo 1
$\alpha 2$	Ampiezza angolo 2
PT	Fori passaggio tiranti
NF	Fori per fissaggio
CP	Cave periferiche
$P_{1\text{mm}}$	Peso indicativo g per 1 mm/sp.

LEGENDA TEGOLO - sezione C

S	larghezza
L	Lunghezza
RI	Fori per rivetti
$P_{1\text{mm}}$	Peso indicativo g per 1 mm/sp.

LEGENDA TEGOLO - sezione C

de	Diametro esterno
di	Diametro interno mm
n	Numero cave
a	Area cava
ld	Larghezza dente
$P_{1\text{mm}}$	Peso indicativo g per 1 mm/sp.

NOTE

