


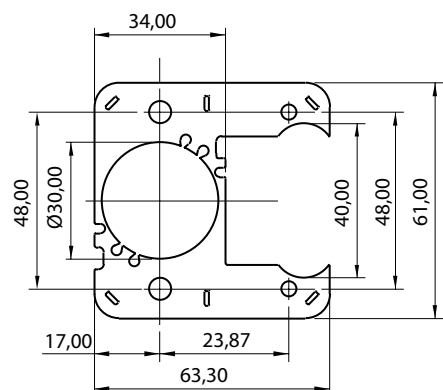


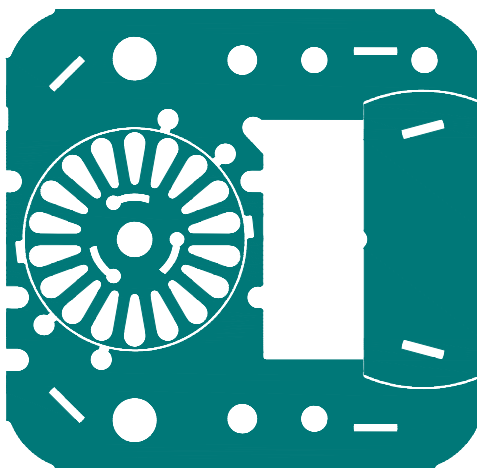

SF 0170C

Lamierini tranciati - Motori a poli schermati

SS061A CPK

TS061A CPK

RS029A CPK

DE mm	DI mm	LU mm	LA mm	LI mm	PB mm	$\alpha 1$ °	$\alpha 2$ °
0,00	30,00	63,30	61,00	17,00	32,00	15,13	46,66

DI mm	L mm	S mm
0,00	40,0	16,00

de mm	n	a mmq	ld mm	ac mm
29,40	18	13,90	1,40	0,00

#	RI	PT	NF	CP	RF	P _{1mm} g
1		✓	✓			14,1

#	RI mm	P _{1mm} g
1		4.70

#	di mm	pz	c	l	P _{1mm} g
1	3,17				2,7
2	4,5				2,66
3	5				2,64
4	6				2,6
5	8				2,52

