


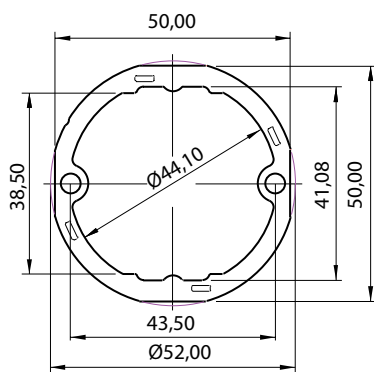


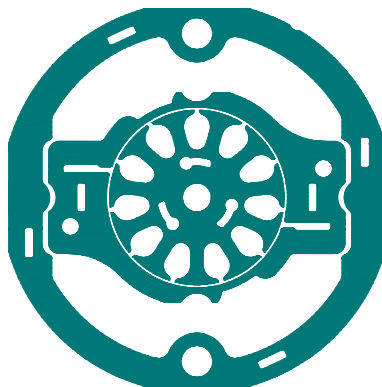

SF 0430C

Lamierini tranciati - Motori a poli schermati

SS052A CPK

TS052A CPK

RS024A CPK

DE mm	DI mm	LU mm	LA mm	LI mm	PB mm	$\alpha 1$ °	$\alpha 2$ °
52,00	0,00	50,00	50,00	43,50	41,08	0,00	0,00

DI mm	L mm	S mm
25,00	41,0	30,30

de mm	n	a mmq	ld mm	ac mm
24,40	11	15,00	1,80	0,39

#	RI	PT	NF	CP	RF	P _{1mm} g
1		✓				5

#	RI mm	P _{1mm} g
1		2.80

#	di mm	pz	c	l	P _{1mm} g
1	4,02				2,17



DE	Diametro esterno
LU	Lunghezza
LA	Larghezza
LI	Interasse
P _{1 mm}	Peso indicativo g per 1 mm/sp.

NOTE

This image shows a full page of blank graph paper. The grid consists of small, uniform squares formed by thin, light blue horizontal and vertical lines. There are no margins, text, or other markings on the page.