


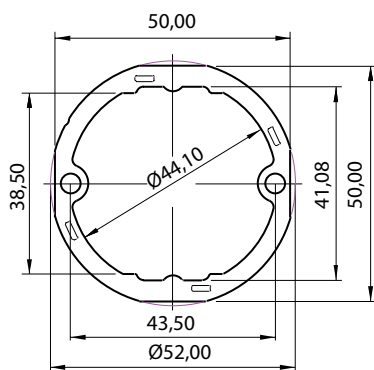


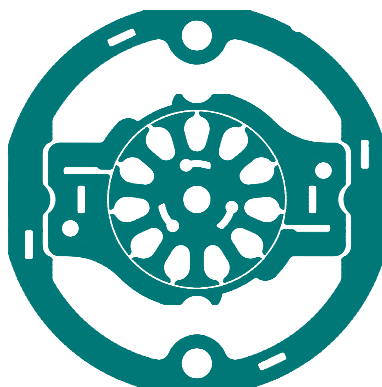

SF 0430C

Lamierini tranciati - Motori a poli schermati

SS052A CPK

TS052A CPK

RS024A CPK

DE mm	DI mm	LU mm	LA mm	LI mm	PB mm	$\alpha 1$ °	$\alpha 2$ °
52,00	0,00	50,00	50,00	43,50	41,08	0,00	0,00

DI mm	L mm	S mm
25,00	41,0	30,30

de mm	n	a mmq	ld mm	ac mm
24,40	11	15,00	1,80	0,39

#	RI	PT	NF	CP	RF	P _{1mm} g
1		✓				5

#	RI mm	P _{1mm} g
1		2.80

#	di mm	pz	c	l	P _{1mm} g
1	4,02				2,17



DE	Diametro esterno
LU	Lunghezza
LA	Larghezza
LI	Interasse
P _{1 mm}	Peso indicativo g per 1 mm/sp.

NOTE

This image shows a full page of blank graph paper. The grid consists of small, uniform squares formed by thin, light gray lines. There are no margins, text, or other markings on the page.