


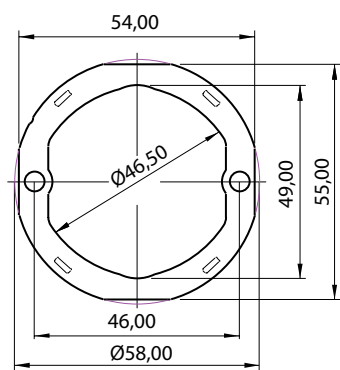


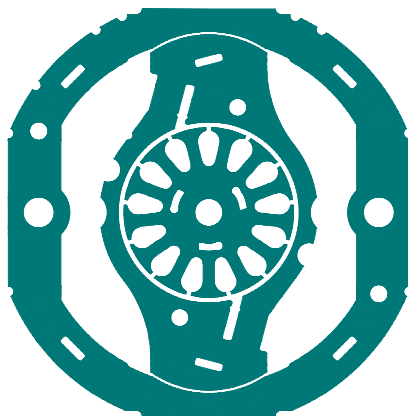

SF 0480C

Lamierini tranciati - Motori a poli schermati

SS058S CPK

TS058S CPK

RS024S CPK

DE mm	DI mm	LU mm	LA mm	LI mm	PB mm	$\alpha 1$ °	$\alpha 2$ °
58,00	25,00	55,00	54,00	0,00	49,00	0,00	0,00

DI mm	L mm	S mm
25,00	49,0	30,00

de mm	n	a mmq	ld mm	ac mm
24,40	13	13,05	1,60	0,80

#	RI	PT	NF	CP	RF	P _{1mm} g
1	✓	✓	✓			6,9

#	RI mm	P _{1mm} g
1		3.81

#	di mm	pz	c	l	P _{1mm} g
1	4				2,15



DE	Diametro esterno
LU	Lunghezza
LA	Larghezza
LI	Interasse
P _{1 mm}	Peso indicativo g per 1 mm/sp.

NOTE

This image shows a full page of blank graph paper. The grid consists of small, uniform squares formed by thin, light blue lines. There are no margins, text, or other markings on the page.